

## Virtus Module

### 245W, 250W, 255W, 260W



Efficiency

**High Module Conversion Efficiency**



easy & quick

**Easy Installation and Handling for Various Applications**



-2400Pa -  
-5400Pa -

**Withstanding Mechanical Load up to 5400 Pa**



IEC & UL

**Conform with PV Standards: IEC 61215:2005,  
IEC 61730:2004, UL 1703**



Certification

**ISO9001, OHSAS18001, ISO14001**



We provide a 10 years material and workmanship guarantee for our modules. In addition, a 90%-power-output guarantee for 10 years and a 80%-power-output guarantee for 25 years of the modules life are provided.

**10-year**

**material & workmanship**

**10-year**


**90% power output**

**25-year**

**80% power output**




## Dimension

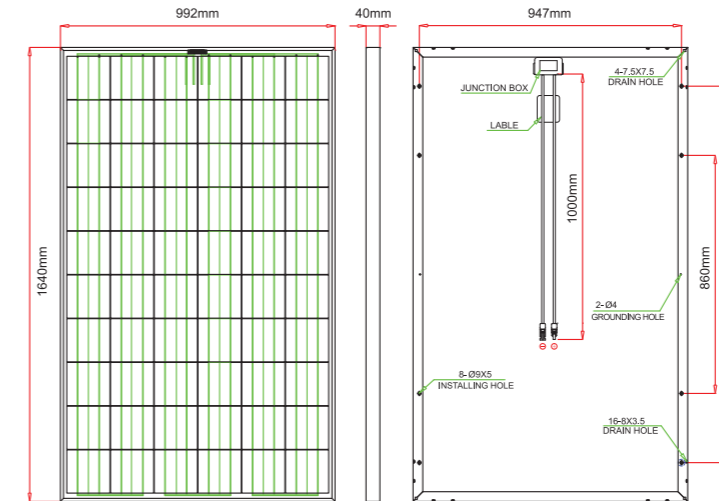

Drawing Only for Reference

## I-V Curves

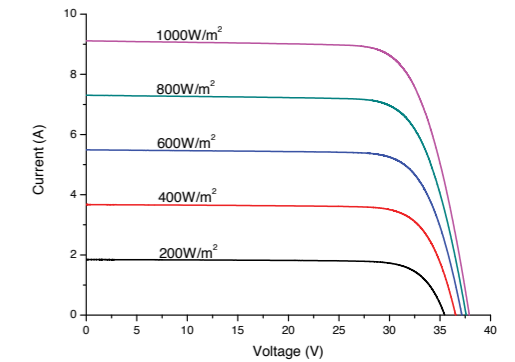

## Efficiency at Varied Irradiation

Irradiance	200W/m <sup>2</sup>	400W/m <sup>2</sup>	600W/m <sup>2</sup>	800W/m <sup>2</sup>	1000W/m <sup>2</sup>
Efficiency	15.7%	16.0%	16.1%	16.1%	16.0%

## Electrical Characteristics STC

	JC245M-24/Bbv	JC250M-24/Bbv	JC255M-24/Bbv	JC260M-24/Bbv
Maximum Power (Pmax)	245 W	250 W	255 W	260 W
Power Tolerance	0 ~+ 5W	0 ~+ 5W	0 ~+ 5W	0 ~+ 5W
Module Efficiency	15.1%	15.4%	15.7%	16.0%
Maximum Power Current (Imp)	8.19 A	8.29 A	8.43 A	8.56 A
Maximum Power Voltage (Vmp)	29.9V	30.2 V	30.3V	30.4 V
Short Circuit Current (Isc)	8.74 A	8.84 A	8.98 A	9.09 A
Open Circuit Voltage (Voc)	37.1 V	37.3 V	37.4 V	37.6 V

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C)

## Electrical Characteristics NOCT

	JC245M-24/Bbv	JC250M-24/Bbv	JC255M-24/Bbv	JC260M-24/Bbv
Maximum Power (Pmax)	182 W	186 W	189 W	193 W
Maximum Power Current (Imp)	6.51 A	6.59 A	6.69 A	6.77 A
Maximum Power Voltage (Vmp)	28.0 V	28.2 V	28.2 V	28.5 V
Short Circuit Current (Isc)	7.07 A	7.13 A	7.20 A	7.27 A
Open Circuit Voltage (Voc)	34.9 V	35.0 V	35.0 V	35.2 V

Values at Normal Operating Cell Temperature, Irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s

## Mechanical Characteristics

Cell Type	156 x156 mm Virtus, 60 (6x10) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65 rated, with bypass diodes
Dimension	*1640 x 992 x 40 mm
Cable Length	1000 mm
Weight	19 Kg
Installation Hole Location	See Drawing Above

## Characteristics

Temperature Coefficient of Voc	-0.29%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C

## Packing Information

	20' GP	40' GP	40' HQ
Container			
Pallets per Container	12	28	28
Pieces per Container	300	700	770

Rev No: JC/TDS/2012.03 \*Contact Renesola for tolerance specification  
CAUTION: All rights reserved. Design and specification are subject to change without prior notice.

## Maximum Ratings

Operating Temperature	-40°C ~ + 85°C
Maximum System Voltage	1000VDC (EU) / 600VDC (US)
Maximum Series Fuse Rating	20A (EU) / 15A (US)